

## Programming for Automatic Transmission Control Module

### [Function Description]


1. This function is required after the replacement of AT (Automatic Transmission) Control Module.
2. This function may be needed when the AT Control Module is abnormal.
3. This function is also needed when upgrading the version of the AT Control Module.

### [Attentions]

1. Before starting this function, ensure the vehicle battery voltage is not under 12V and the device is fully charged. When programming, the device shall be connected to the network.
2. During the function, do not interrupt it deliberately, otherwise it will lead to severe consequence, for example, the AT Control Unit failed to work.
3. If only the electronic control module is replaced, the valve body is not replaced, it is required to reinstall the old control module, the program will read the key data from it.

### [Instructions]

1. Select "Control Module Programming" under the function menu of the AT control unit. It prompts whether to reinstall the old AT control module. If needed, click YES to start the manual installation.

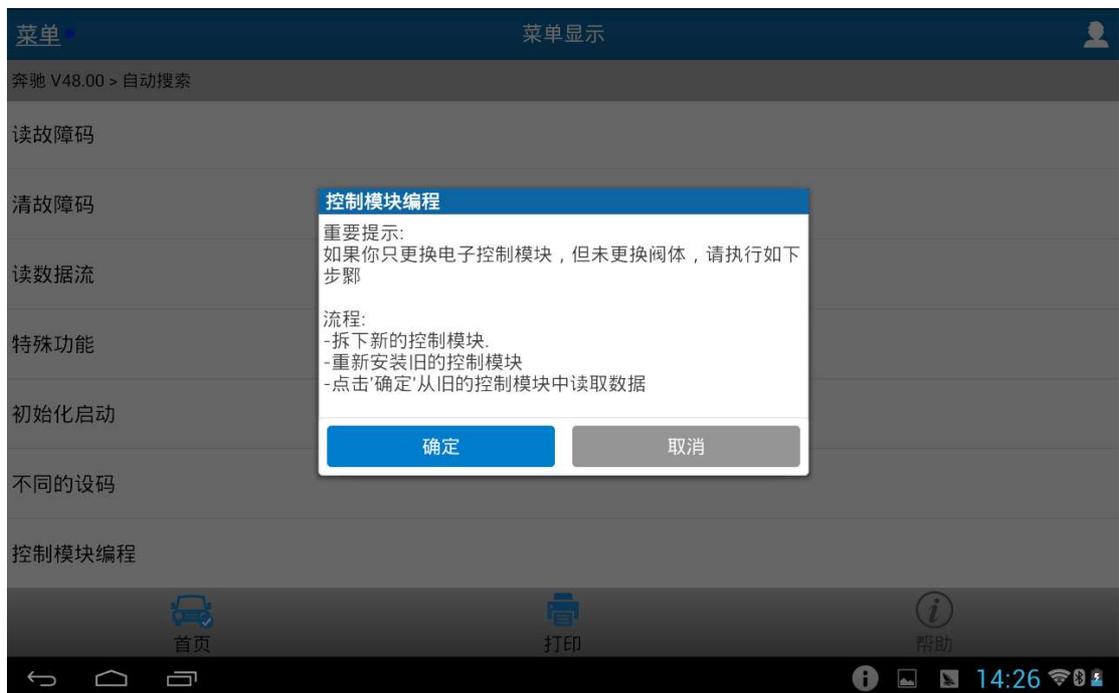





- It displays the part number interface after reading the data. If the part number of the new control module is not read, click "Edit" to manually input the corresponding part number.



- After confirming the information, click "Continue". The device will prompt the conditions to perform the control module programming. Ensure the vehicle battery voltage is not under 12V and the device is fully charged. When conditions are met, the corresponding configuration file will be downloaded. At this time, do maintain a stable network.

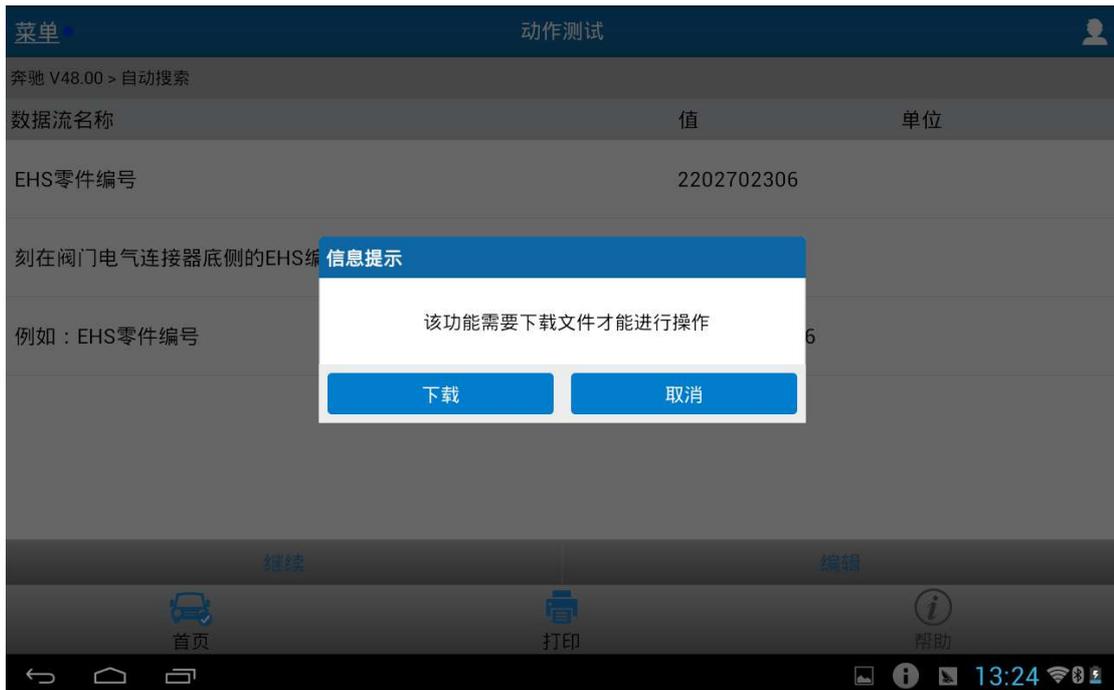

4. After the configuration file is downloaded, it displays the software version information of the control unit and the programming requirements.

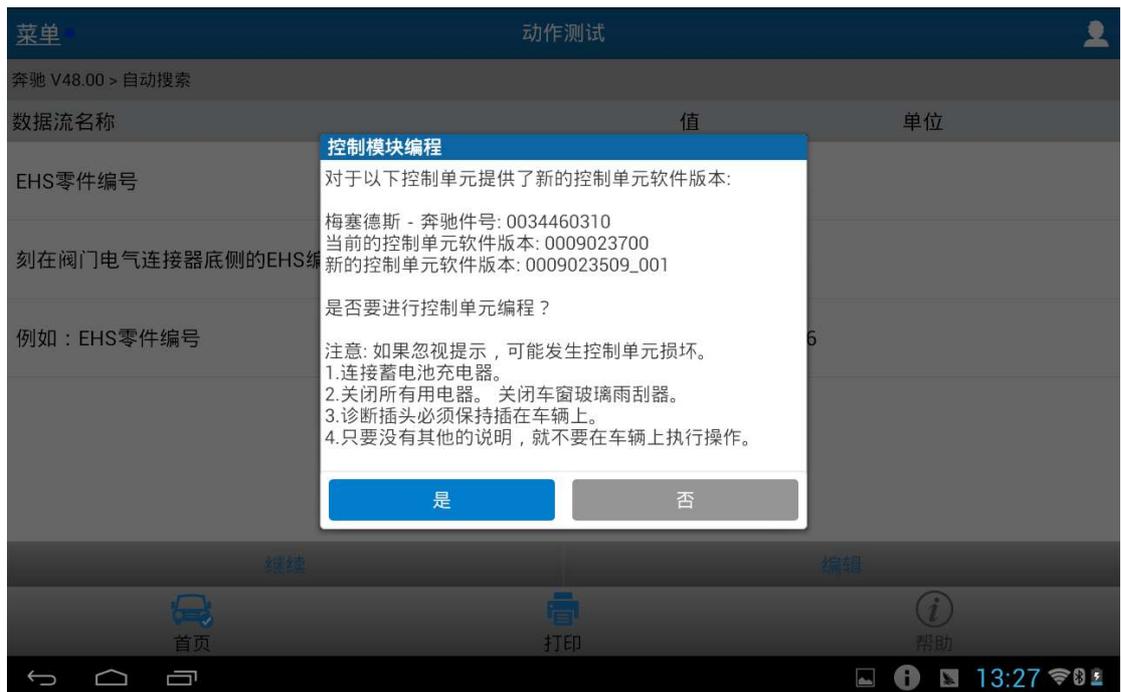


5. Programming is to flash the control unit. If actuation failed, the control unit may fail to work normally. Click YES to start the programming.




6. On the top of the programming interface, it displays the name of the file to be configured and the programming progress. The programming may take a long time, please wait.



7. It prompts the programming succeeded.

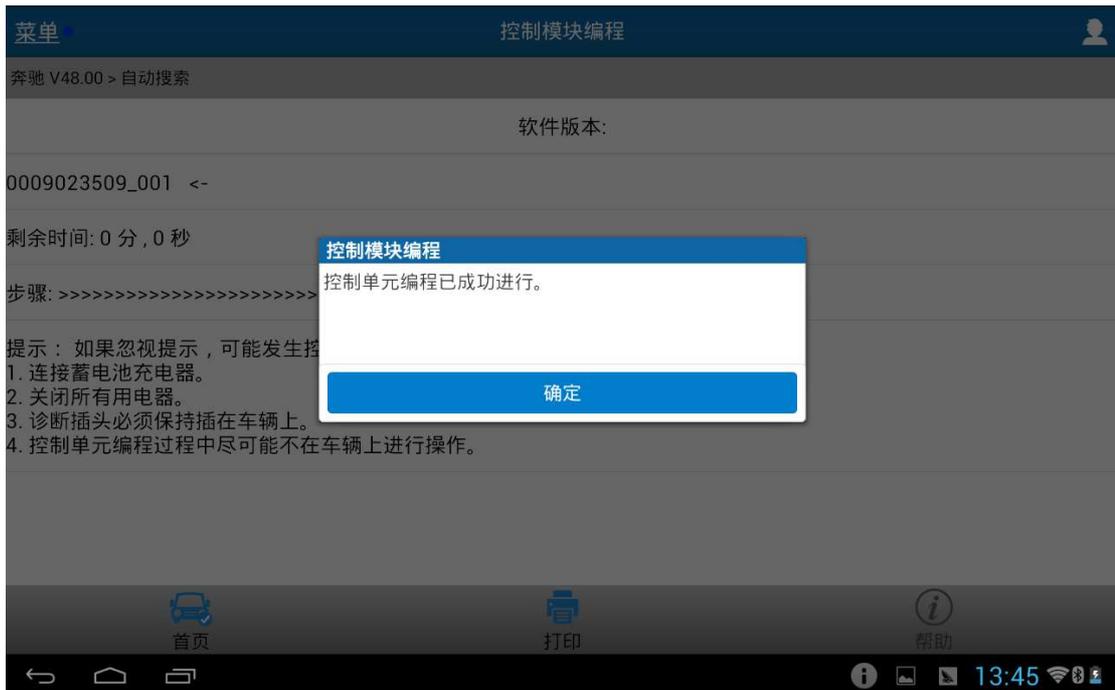

- Turn off the ignition and on again as prompted. ArtiPad I will complete the reset of the control unit. Now the control module programming is successfully carried out.

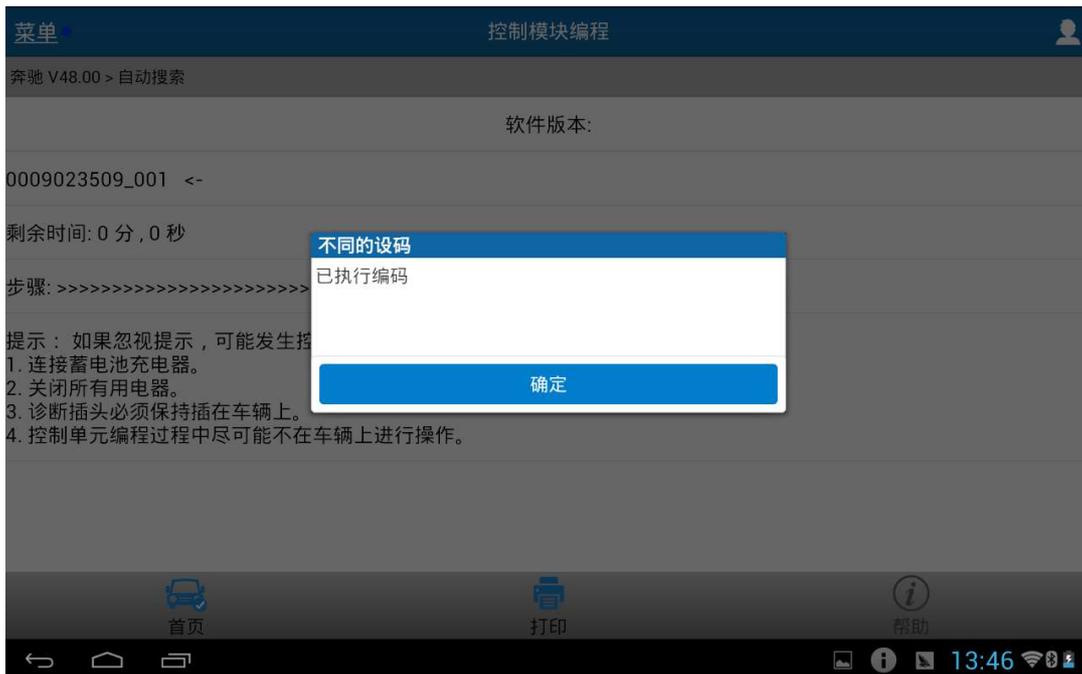

### [Declaration]

The copyright of this document belongs to Topdon Technology Co., Ltd. Any company or individual shall not quote or reprint without permission.